

INSUFFLATORS



CO2 INSUFFLATORS – 20 L (WITH AIR)


TECHNICAL SPECIFICATION

PARAMETERS	ENCO2 20L A
Insufflation pressure	4-30 mmHg
Dimension	290*110*300 mm
Weight	4 kg
Gas	CO2(medical +Air)
Gas Connection	UNF 7/16 "
Power Consumption	15 Watts max
Input Pressure minimum	3 Bar
Input Pressure maximum	10 Bar
Output Connection	4 - 5 mm ID Tube
Flow Rate Setting	1-20 Ltr/min
Keyboard	Feather touch
Gas Warmer	Built in
Manufactured and tested	IEC 601-1/EN 60601-1
Input Supply Voltage	230 VAC+ 15% @50/60 Hz(110 V optional)

PERFORMANCE FEATURES

**Inbuilt System
Gas Heater**

**High Performance Cost
Effective Technology**

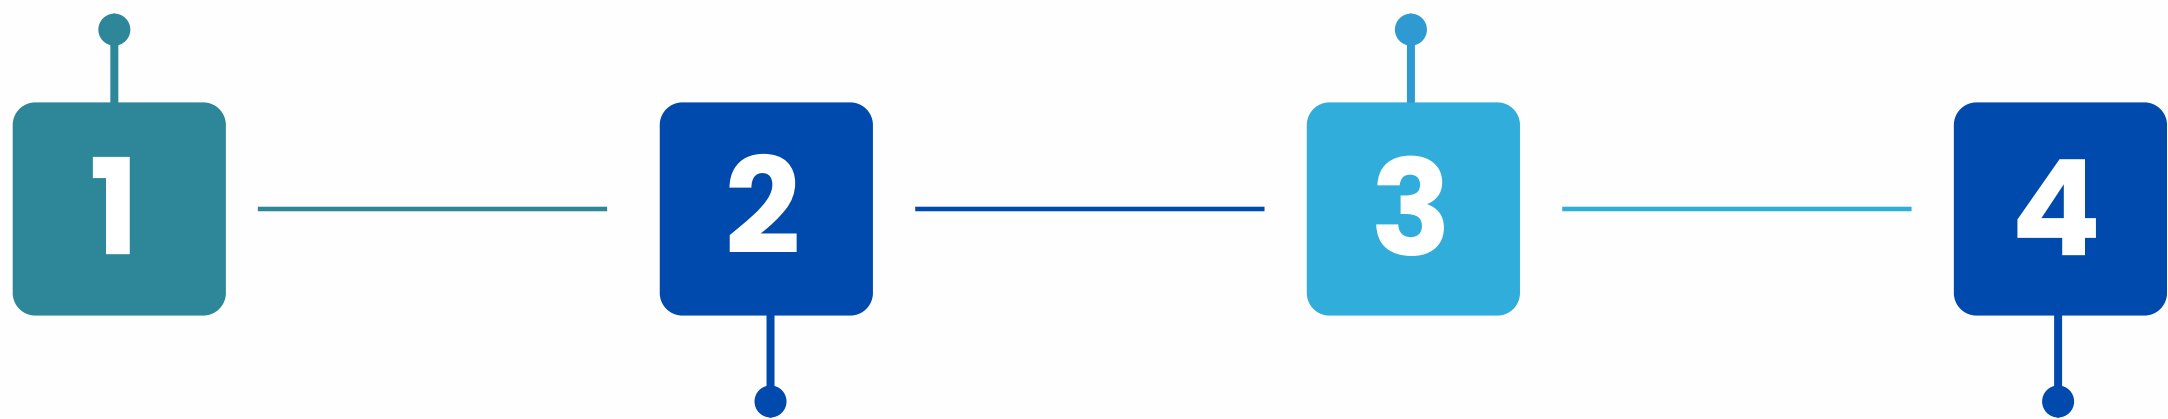

**LED 7 Segment real time data
Display For Set and Actual
Pressure Set Volume, Gas
Consumption Volume, fault**

**Microcontroller
Based, Feather
Touch, Digital
System**

CO₂ INSUFFLATORS – 20 L (WITH AIR)

