

INSUFFLATORS



CO2 INSUFFLATORS – 20 L


TECHNICAL SPECIFICATION

PARAMETERS	ENCO2 20L
Insufflation pressure	4-30 mmHg
Dimension	290*110*300 mm
Weight	3.5 kg
Gas	CO2(medical)
Gas Connection	UNF 7/16 "
Power Consumption	15 Watts max
Input Pressure minimum	3 Bar
Input Pressure maximum	10 Bar
Output Connection	4 - 5 mm ID Tube
Flow Rate Setting	1-20 Ltr/min
Keyboard	Feather touch
Gas Warmer	Built in
Manufactured and tested	IEC 601-1/EN 60601-1
Input Supply Voltage	230 VAC+ 15% @50/60 Hz(110 V optional)

PERFORMANCE FEATURES

Software controlled
pressure release
mechanism

High Performance Cost
Effective Technology

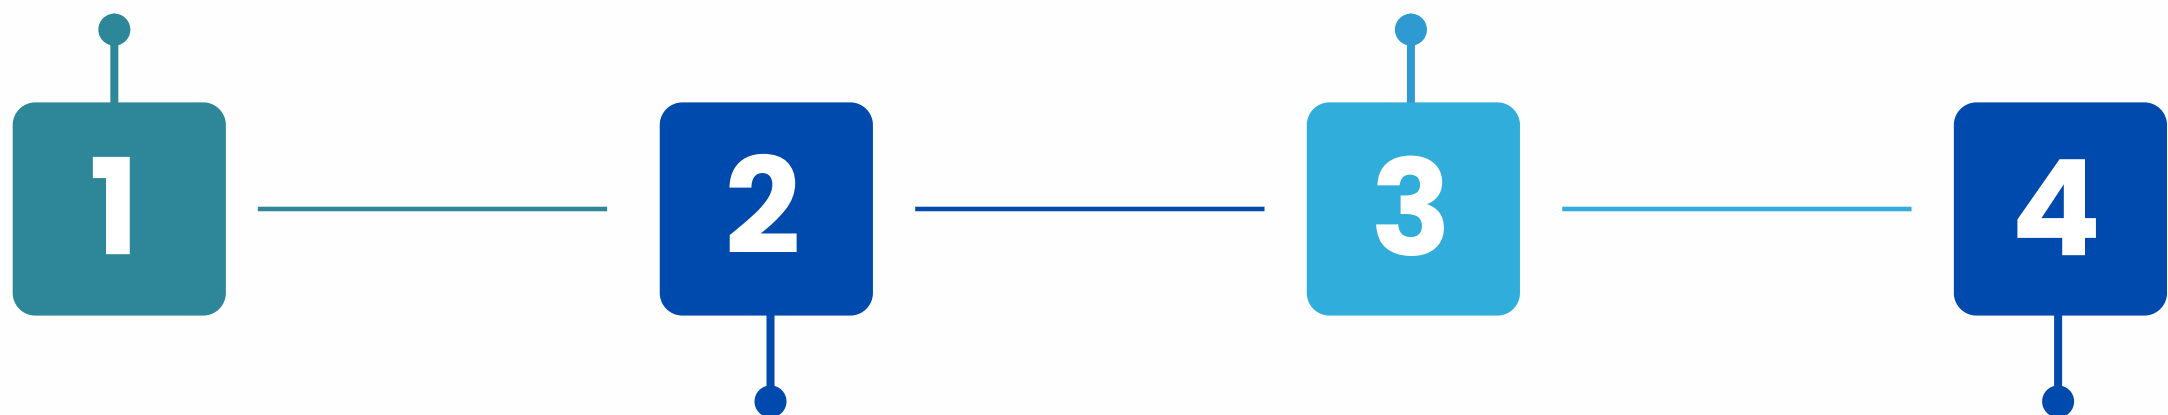

Advance Flow
Control Insufflations
for Precise and Safe
Gas Flow Controller

Microcontroller
based, Feather
Touch, Digital
System

CO₂ INSUFFLATORS – 20 L

