

# ENSURG 400




**ESU**

# TECHNICAL SPECIFICATION

MODEL	ENSURG 400
Power	400 W
Operating Frequency	480 KHz
Input Voltage	170-260 VAC/50 Hz
Display	7 seg LED
Weight	5.5 kg
Tissue Response Circuit	Available
Patient plate Monitoring System	Available
<b>Monopolar cut mode</b>	
Pure Cut	400 W
Blend 1	250 W
Blend 2	200 W
Endocut	99 W
<b>Monopolar coagulation modes</b>	
Spray	120 W
Fulguration	150 W
Desiccation/soft	150 W
<b>Bipolar modes</b>	
Micro	80 W
Macro	80 W
Bi-Cut	99 A

# PERFORMANCE FEATURES

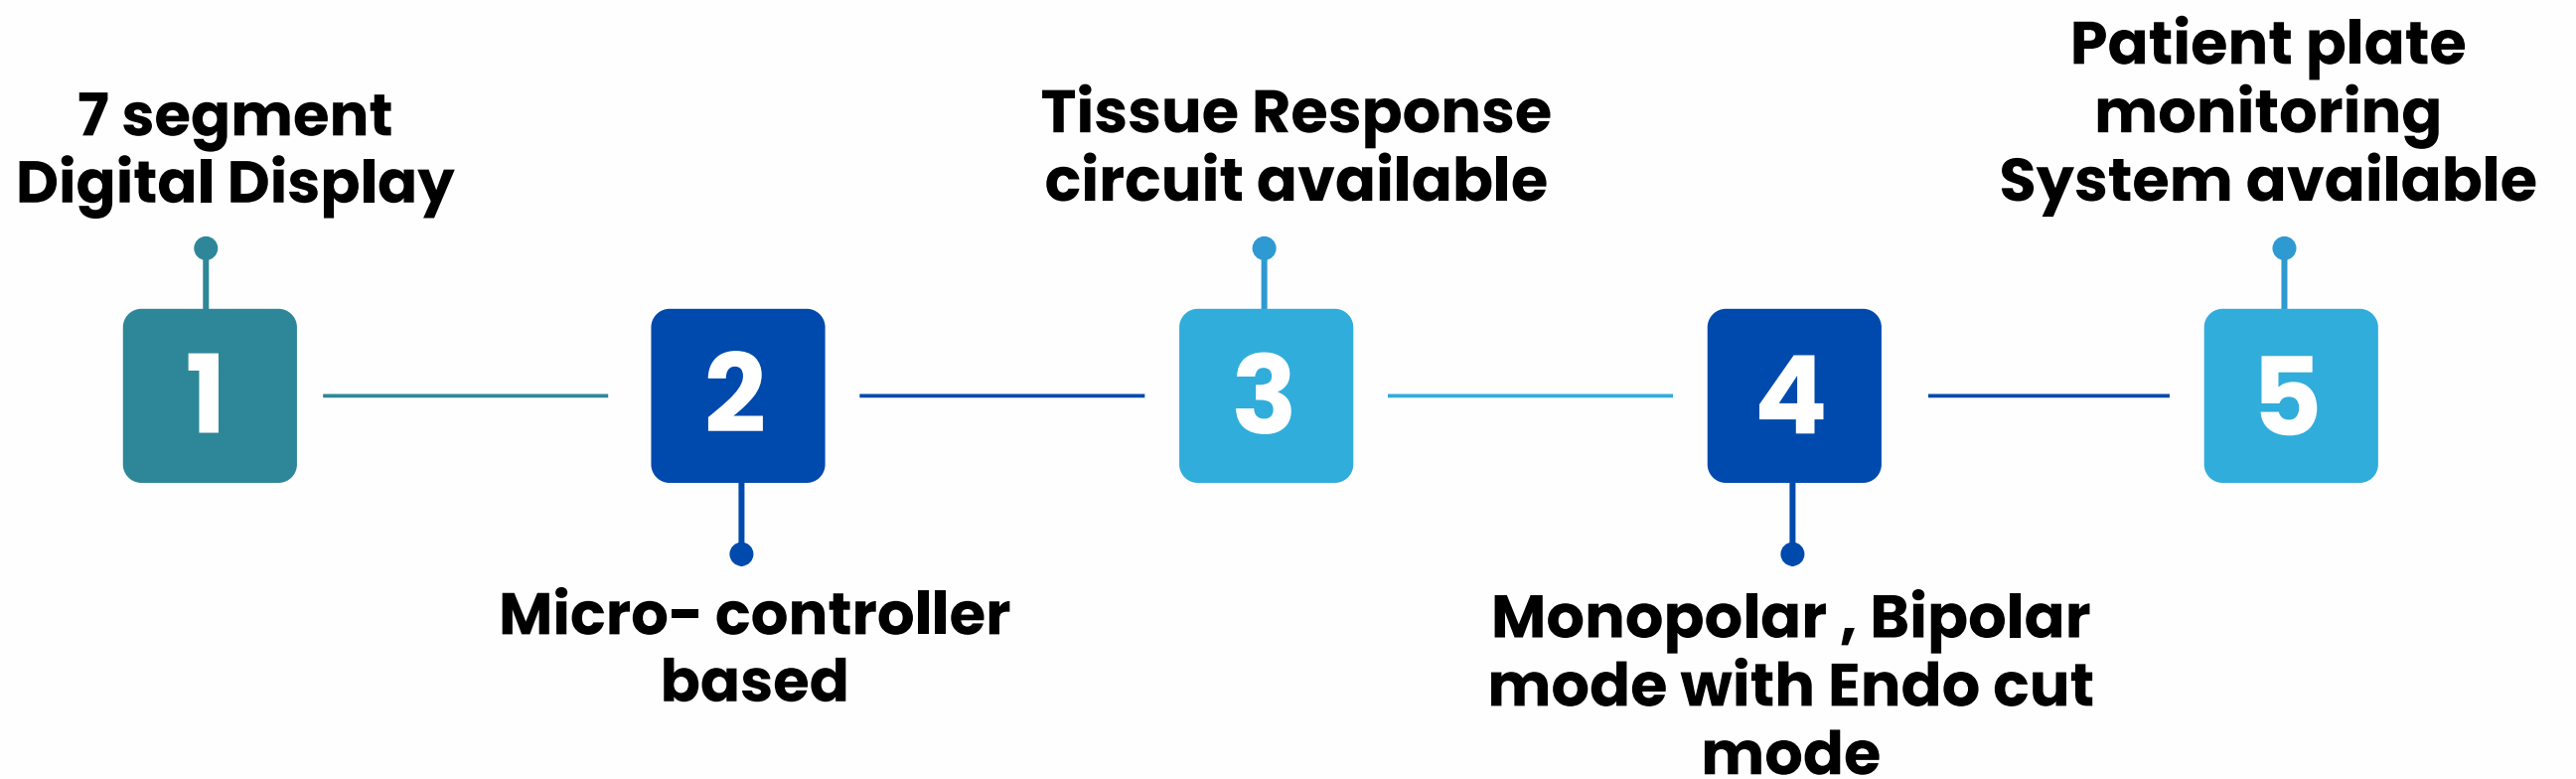

## ENSURG 400

