

# FASTSEAL PLUS



**ESU**

# TECHNICAL SPECIFICATION

MODEL	FASTSEAL PLUS
Power	400 W
Operating Frequency	480 KHz
Input Voltage	230 VAC + 15% @ 50/60 Hz (110 V optional)
Display	LCD
Weight	5.5 kg
Program	99 Programs Memory
Tissue Response Circuit	Available
Patient plate Monitoring System	Available
<b>Monopolar cut mode</b>	
Pure Cut	400 W
Blend 1	250 W
Blend 2	200 W
Endocut	99 W
<b>Monopolar coagulation modes</b>	
Spray	120 W
Fulguration	150 W
Desiccation/soft	150 W
<b>Bipolar Modes</b>	
Bi-Coag	120 W
Bi-Cut	120 W
Sealer Mode	Available
Seal	150 W




# PERFORMANCE FEATURES

Lowest lateral  
spread thus  
better quality  
white seal

Suitable for  
Bipolar &  
Monopolar Under  
water surgeries

Graphic LCD display

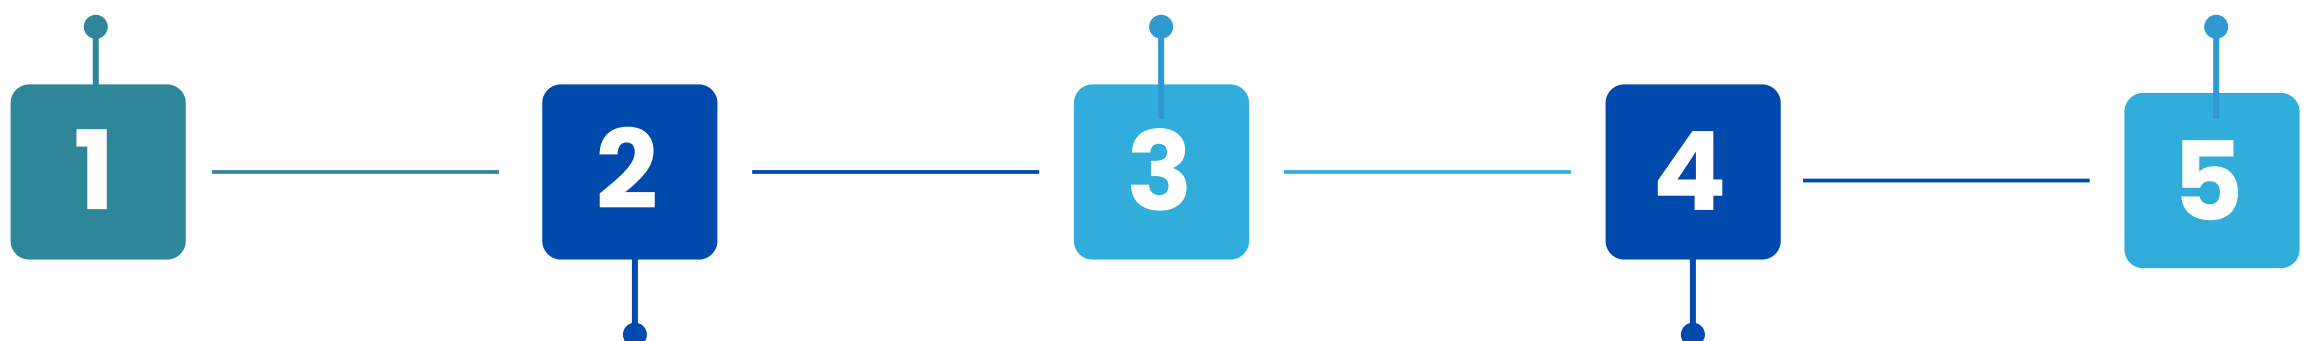

Self test facility

Real time tissue  
impedance  
measurement with  
auto stop

# FASTSEAL PLUS

